


Meets the Updated 2024 Uniform Mechanical Code for HVAC Condensate Removal and is ICC-Certified

STOP USING
P-TRAPS

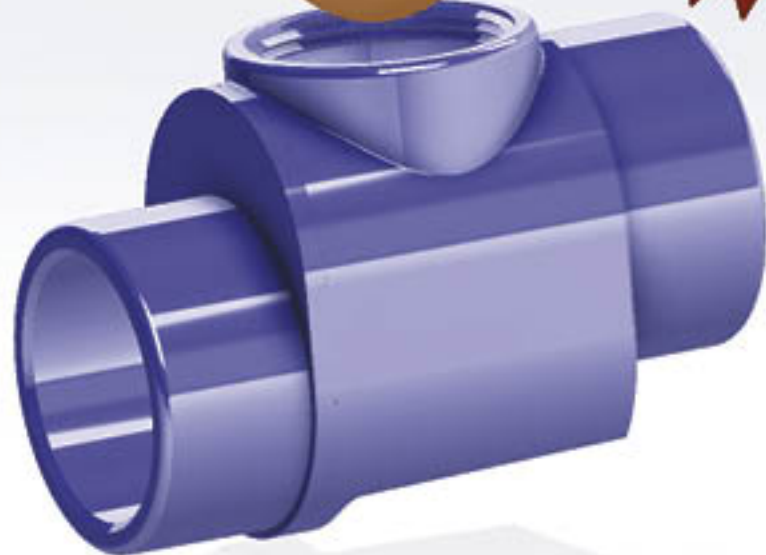

RLC-HF-Series

Negative Pressure High-flow Waterless Trap

| | | |
|------------------------------------|------------|-----------------|
| Gallons per minute condensate flow | 6 gallons | |
| Max. negative pressure of WC | 20 inches | |
| Available connection sizes | 1-1/2" | 2" with fitting |
| Length | 4.6 inches | |

HVAC Air-Trap™

WATERLESS HVAC CONDENSATE TRAPS



ICC-ES Evaluated



www.deschampstechnologies.com

www.waterless-trap.com